



since 1946

Ernest Fleming
machinery & equipment pty ltd

Website: www.fleming.com.au

Phone: (+61) 02 9427 3270

Email: sales@fleming.com.au

Address: 7/27 Mars Rd, Lane Cove West, Sydney NSW 2066 Australia

Flamingo Standard Carton Taper

Flamingo top-selling product package deal, Carton Taper with U2 Smart is easy to use and accurate box taper. Rugged and practical, box tapers automatically apply self-adhesive tape on the top and/or bottom of boxes for a full, secure, and uniform seal. Users benefit from savings from decreased tape usage, quicker packaging, reduced operator fatigue, and improved product appearance and protection. Includes motorized Industrial-grade case traction bands and entry/exit extension roller conveyors.

FEATURES:


- Tapes smaller boxes than most other machines available
- Generates no tape waste
- Versatile- Capable of closing a wide variety of case dimensions
- Applies tape onto cases accurately, uniformly and repeatedly.
- Upgraded tape head now accepts 2" and 3" tape.
- Excellent product presentation
- Quickens the taping process
- Reduces operator fatigue. On castors

- Easy to use and maintain
- Easy-change tape heads
- Adjustable Conveyor Height: 580 – 850 mm
- 2 high-friction conveying side belts
- Equipped with adjustable guide rails with measurement
- Box size adjustment made quickly and without tools
- Equipped with 50mm tape heads
- Includes infeed and exit roller conveyors
- Equipped with locking casters for ease of movement

OPTIONAL

- Material: Stainless Steel
- Extended Infeed or Outfeed roller conveyors
- U2 Smart Batch, Bar code, QR code and Expire date printer

EFBT-80

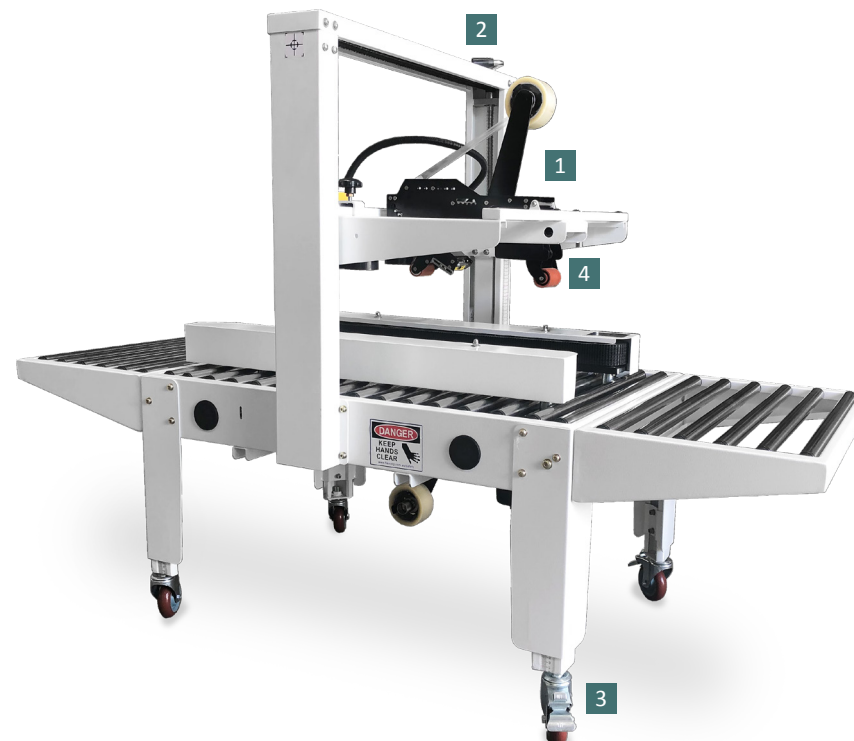




Optional

GANSER | U2^{australia}

U2 Smart / U2 Smart-One Inkjet Batch Coder

powered by
INKJET PRINT
Phone: 02 9427 3357

Integrated batch and expire date coder for Porous and Semi-Porous substrates. Consistent pin-point and Crystal clear at HD 600dpi printing result. Also, U2 Smart-One 1 inch printing height optional



Specifications

production speed	box/m	up to 40
input voltage	V	240V/50-60Hz
tape ends	mm	30 – 60
minimum box	95 mm (W) x 85 mm (H) x 150mm (L)	
maximum box	500 mm (W) x 500 mm (H) x 1500mm (L)	
acceptable rolls	m	up to 1000
width	mm	800
height	mm	1600 +/-100
length	mm	1800
weight	kg	90

* Please confirm specifications on order as features may change

EFBT-80U

Flaming Carton Taper with Batch Coder



EFBT-80SS

Flamingo Stainless Steel Carton Taper



EFBT-80E

Flamingo Extended Outfeed Carton Taper



production speed	box/m	up to 40
input voltage	V	240V/50-60Hz
tape ends	mm	30 – 60
minimum box	95 mm (W) x 85 mm (H) x 150mm (L)	
maximum box	500 mm (W) x 500 mm (H) x 1500mm (L)	
acceptable rolls	m	up to 1000
width	mm	800
height	mm	1600 +/-100
length	mm	1800
weight	kg	90

* Please confirm specifications on order as features may change

production speed	box/m	up to 40
input voltage	V	240V/50-60Hz
tape ends	mm	30 – 60
minimum box	95 mm (W) x 85 mm (H) x 150mm (L)	
maximum box	500 mm (W) x 500 mm (H) x 1500mm (L)	
acceptable rolls	m	up to 1000
width	mm	800
height	mm	1600 +/-100
length	mm	1800
weight	kg	90

* Please confirm specifications on order as features may change

production speed	box/m	up to 40
input voltage	V	240V/50-60Hz
tape ends	mm	30 – 60
minimum box	95 mm (W) x 85 mm (H) x 150mm (L)	
maximum box	500 mm (W) x 500 mm (H) x 1500mm (L)	
acceptable rolls	m	up to 1000
width	mm	800
height	mm	1600 +/-100
length	mm	2400
weight	kg	120

* Please confirm specifications on order as features may change