Website: www.fleming.com.au Phone: (+61) 02 9427 3270



### Flamingo Benchtop Gear Pump Filler-2 Pump

Flamingo EFGP-B2 gear 2 pump filler can be used in various industries including pharmaceutical, food, cosmetics, agriculture and chemical industries. Suitable for fruit and vegetable drinks, milk, shampoo, cream, lotions and oils.

Filling Speed Approximation for liquids with an SG approx. =1 and a viscosity of approx. 1 cP (dependant on product and nozzle design)


- 2 nozzle Gear pump filler per minute at 500ml approximately 20-• 22 per minute
- 4 nozzle Gear pump filler per minute at 500ml approximately 30-• 34 per minute
- . 6 nozzle gear pump filler per minute at 500ml approximately 40-46 per minute

#### Benefits

•

•

- The EFGP-B2 uses a gear pump concept as a metering device to fill correct amounts of gels or liquids into containers.
- Trickle Speed Function Each filling cycle can start fast and slow down at the finish to eliminate bubbles of foamy materials.
- 20 different programs can be saved and recalled related to • different sizes and viscosities
- . Internal/external shut-off Anti-Drip Nozzles included (dependant on product and container).
- . Pump Heads are cleaning-friendly no tools required to dismantle.
- Adjustable and percentile filling speed
- Delta Touchscreen with Delta PLC programmed by Flamingo Products
- Modular with ability to upgrade to 4, 8 and 16 heads .
- Product Counting Function .












### **Specifications**

power source	V	240
filling volume	ml	10-5000
production speed	bpm	16-25
air source required	bar	6-8
width	mm	1400
height	mm	1850
length	mm	2400
weight	kg	50

\* Please confirm specifications on order as features may change

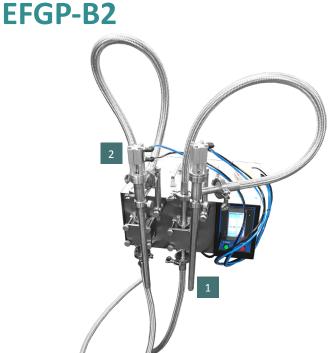

EFGP-A2



#### Flamingo Gear Pump Filling Line 1 Pump

	power source
	filling volume
	production spe
	air source requi
	width
	height
	length
	weight
	<sup>t</sup> Please confirm spec

power source		V	240
filling volume		ml	10-5000
production spe	ed	bpm	10-16
air source requ	ired	bar	6-8
width		mm	1400
height		mm	1850
length		mm	2400
weight		kg	96

cifications on order as features may change



power source	V	240
filling volume	ml	10-5000
production speed	bpm	20-26
air source required	bar	6-8
width	mm	1400
height	mm	1850
length	mm	2400
weight	kg	100

\* Please confirm specifications on order as features may change

## EFGP-A4 Flamingo Benchtop Gear Pump Filling Line



ĺ	power source	V	240
	filling volume	ml	10-5000
	speed	bpm	40-46
	air source required	bar	6-8
	width	mm	1400
_	height	mm	1850
	length	mm	2400
	weight	kg	120

Please confirm specifications on order as features may change

# **EFGP-B1** Flamingo Benchtop Gear Pump Filler

1 Pump



power source	V	240
filling volume	ml	10-5000
speed	bpm	10-16
air source required	bar	6-8
width	mm	1400
height	mm	1850
length	mm	2400
weight	kg	40

\* Please confirm specifications on order as features may change