



Flamingo Clamp-on Stirrers

Flamingo Clamp-on Mixers are useful for a wide range of Blending, Dissolving or Dispersing Applications.

The Standard Range of Flamingo Mixers are supplied with universal swivel bracket, coupling, 900mm long stainless steel shaft & stainless steel polished cast propellers, IP 55 motor rating, specifications below.

Generally High Speed Stirrers give a high shear action and a relatively low pumping capacity. They are most suited to

dissolving solids, aerating liquids and chemical reactions.


Slow Speed Stirrers have a high pumping capacity, but low shear action and are most useful for blending miscible liquids and maintaining solids in suspension. Suitable for high flow applications.

OPTIONS:

- Hazardous Area or Stainless Steel Motor
- Flanged Motors
- Variable Speed Drives.
- Air Motors
- Specials Made to Order
- Supplied with Tanks



EFCM-2250

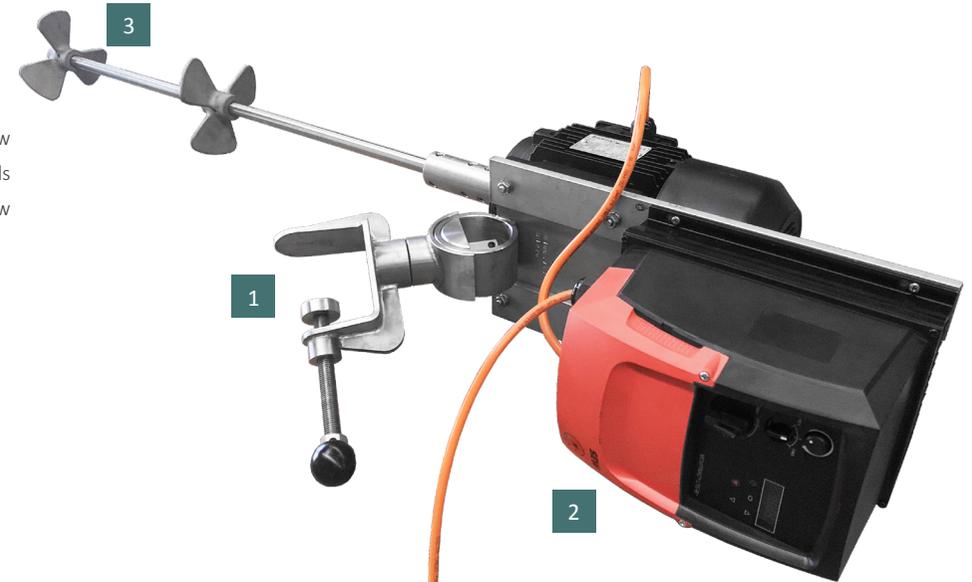

* Stirrer with optional VSD

KW	RPM	Shaft Diameter	Propellers Number & Size	Weight
0.37	175	7/8"	1 only 250mm dia.	24kgs
0.75	175	7/8"	1 only 300mm dia.	32kgs
1.5	175	7/8"	1 only 300mm dia.	49kgs
0.37	385	7/8"	1 only 250mm dia.	24kgs
0.75	385	7/8"	1 only 300mm dia.	23kgs
1.5	385	7/8"	1 only 300mm dia.	49kgs
0.37	900	3/4"	2 only 100mm dia.	21kgs
0.75	900	3/4"	2 only 125mm dia.	25kgs
1.5	900	7/8"	2 only 150mm dia.	43kgs
0.37	1400	3/4"	2 only 100mm dia.	21kgs
0.75	1400	3/4"	2 only 125mm dia.	23kgs
1.5	1400	7/8"	2 only 150mm dia.	28kgs



* Please confirm specifications on order as features may change